


# greenteQ Clearspan Slim Intermediate Lock for S1000 Slimline Bi-Fold Doors

Provides secure and smooth closing of Smarts Visofold slimline aluminium bi-fold doors.

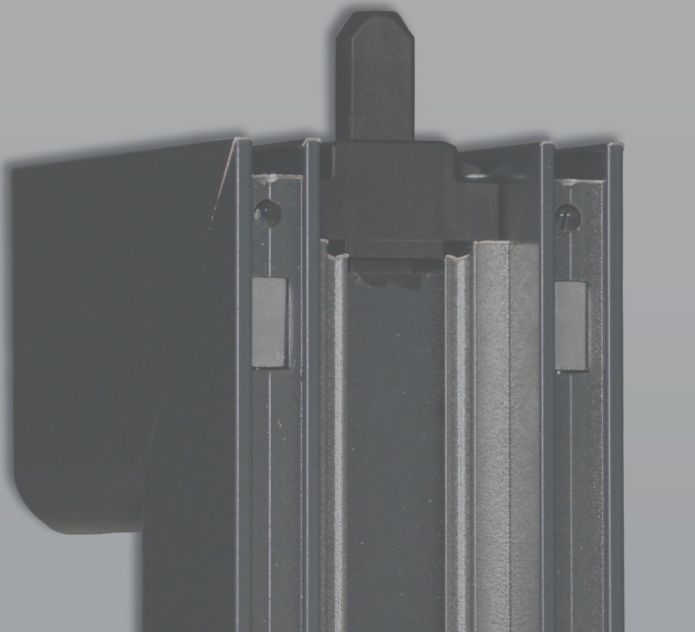

The 8mm diameter steel threaded rod with 24mm throw keeps would-be intruders out whilst the pre-installed tapered shootbolt ends ensure a smooth closing action for the user and provide effective weather sealing.

The robust gearbox has a 7mm square spindle with standard 43mm fixing centres. Fabricators can opt to fit either a standard slimfold handle or the centrefold lockable handle.

When installed, the lockcase is covered by an attractive black cover with subtle Clearspan and greenteQ Q branding.


Clearspan Slim Intermediate lock can be ordered as individual parts or as bulk sets of 25.

The slim construction of the greenteQ Slim Intermediate lock is suitable for doors constructed using Smart's Slimline profile range.

If ordering the '25' option the items are delivered in bulk packaging, i.e. not in individual kits.

## KEY FEATURES AT A GLANCE

- Perfect for slimline Smarts profiles
- 24mm projection
- 10 year guarantee

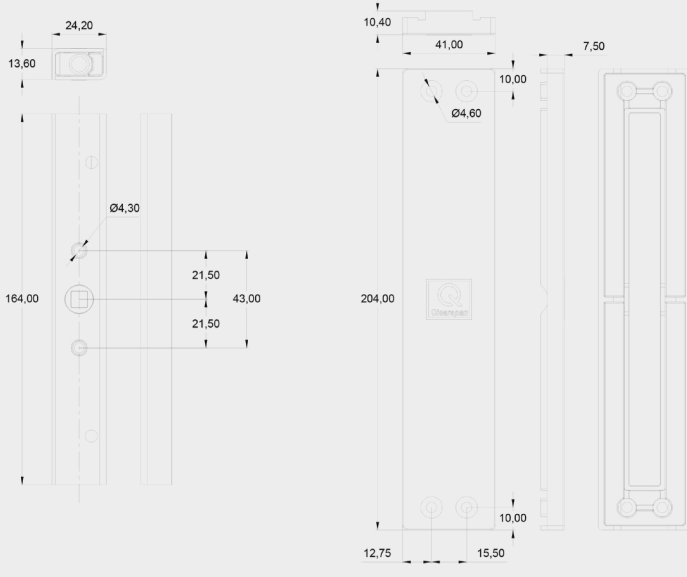

greenteQ Clearspan Slim Intermediate Lock for S1000 slimline bi-fold doors can be ordered online at [www.vbhgb24.com](http://www.vbhgb24.com) using codes 4QBF1049(gearbox), 4QBF1048(cover), and 4QBF1035 for 25 bulk sets.